The Forestry Corp.

Watershed Assessment Model GIS Application System Guide

June 1998

TABLE OF CONTENTS

1.0 OVERVIEW	1
2.0 DEVELOPMENT ISSUES	•
2.1 Introduction	
2.2 Project Area Selection	••••••
2.3 Generating Stream Routes	
2.4 Arc Vertex Limit	
2.5 ArcView Line Graph Limit	
3.0 PROGRAMMING STRUCTURE	2
3.1 Introduction	
3.2 Programming Model	
3.3 In-Line Documentation	
3.4 Temporary Files	
3.5 Variables	
4.0 INSTALLING AND RUNNING THE APPLICATION	7
4.1 Introduction	7
4.2 System Requirements	7
4.3 Application System Setup	7
4.4 Application Data	9
4.5 Launching the Application	
4.6 General Flow	
5.0 APPLICATION TABLES	11
5.1 Introduction	11
5.2 Application Defaults	11
5.3 Project Tracking	14
5.4 Stream Flow Calculations	15

APPENDIX A	16
Application Tables	16

iona

990

Nine |

1.0 Overview

The Watershed Assessment Model (WAM) is an ArcInfo AML application used to generate watershed and stream characteristics from existing digital elevation, stream network, and plot location data. The application is intended to run in a client-server environment where all processing is performed using the WAM interface on an ArcInfo UNIX server, and the results are viewed and queried from ArcView on a networked PC.

The balance of this document will discuss some of the issues faced during the development of the application, the programming standards, how to install and launch the application, how to make changes in the application, and program flow. The WAM System Guide is one of three documents delivered with the installation of WAM. The WAM Final Report describes the general approach and methods involved in completing the project from the initial concepts through to the completion of development. The WAM User Guide describes how to use the application, from launching the main menu to detailed descriptions of the resultant data. These documents can be referenced when information beyond the scope of this document is required.

The System Guide is written for the person(s) responsible for application administration. The responsibilities of the administrator include installation, system environment configuration, and performing any changes to the application which may be required. To perform these tasks, the administrator should be knowledgeable in both UNIX system administration and in ArcInfo, although the standard application startup and maintenance is not complex. The System Guide should be used in conjunction with the WAM User Guide to make the administrator aware of how to use the application, it's resultant data, and the potential impact of any changes made to the application.

2.0 Development Issues

2.1 Introduction

This section discusses unforeseen technical issues which arose during development of the application. Each issue is described generally, then an explanation follows as to how each was resolved and the impact, if any, to the original application framework.

2.2 Project Area Selection

Originally a single DEM dataset for the entire Foothills Model Forest area was to be built from which all WAM application analysis would be completed. Using the system hardware in place at the time, the dataset was simply too large to process as insufficient virtual memory could be allocated for the ArcInfo topogrid command. This command is used to build hydrologically correct elevation grids from elevation point, line and polygon data. To solve this problem, functions were added to manage WAM analysis by project. The projects are defined by a geographic area for which an elevation grid is generated and all subsequent analysis is completed using the geographic extents of this dataset. The problem which can be encountered with this approach is that the user may select a project area which does not fully encompass the drainage basin (see User Guide glossary) for a selected point and will consequently calculate incorrect area values. The potentially incorrect basin area values are written to the output plots table, which are also used to calculate feature densities (density of a linear or point feature inside a basin area). To minimize the chance of an incomplete project area being defined, the selected areas are buffered and then overlaid with a Foothills Model Forest wide basin coverage to determine all overlapping basins. The extent of all selected basins is then used to define the extent of the project. These problems will be eliminated once a hydrologically correct DEM and a corrected streams network are created. The streams network is also required as the application would have to build an elevation grid using smoothing parameters resulting in a network of sufficient connectivity to run the WAM analysis.

2.3 Generating Stream Routes

The application functionality includes the measurement of distances up and down stream from a point along a stream. To accomplish this the application applies ArcInfo's dynamic segmentation data structures to build route features from contiguous streams sharing the same order. Originally it was thought that the order routes could be generated using the single arcroute command specifying the order item as the grouping attribute. But arcroute is unable to base route direction on the underlying arc direction meaning that using this command would result in some streams flowing uphill. The method used to build route systems and control the direction of individual routes is to build the routes using the arcroute command, select those routes which flow in the wrong direction and apply the flip command in Arcedit to correct the direction. Because this work-around can take a considerable amount of time to complete it is performed as an extra step in the application. The most likely fix for this problem is added functionality to the arcroute command to control route direction based on arc direction.

2.4 Arc Vertex Limit

During the calc_attribs process, stream lengths are calculated for those streams closest to input plot locations. Originally, the lengths were simply extracted from the AAT of the resultant coverage after applying the ArcInfo eventarc command. Currently there is an ArcInfo limitation which restricts a single arc to be comprised of a maximum 500 vertices. Once this limit is reached, the system automatically splits the arc. A fix for this problem sums the length of all arcs belonging to a single route. This process does not require significant additional processing time.

2.5 ArcView Line Graph Limit

During the calc_attribs process, stream profile tables are generated for buffer and source to mouth stream routes. Currently there is an ArcView limitation that restricts it from generating line graphs for more than 100 samples points. Although an option exists with the surfacexection command to define a distance for sampling along the stream arcs, it was discovered that additional points were added in the tables and therefore could exceed the 100 point maximum. An additional process was added to ensure that there were no sample points closer than the specified sample distance. This process impacts processing time slightly, depending on the number of streams in the profile table. This problem can only be resolved by removing the limit of sample points for line graphs in ArcView or by a change to the surfacexsection function which guarantees exact sample distances in the arc profiles.

3.0 Programming Structure

3.1 Introduction

The application administrator should be aware of the program structure of the application in the event they wish to perform changes to the AML code. These changes may be required for example, if the application is moved to another site, the input data structure changes, or to take advantage of updates to the ArcInfo GIS software. All application code is written in AML and is not encrypted allowing complete access and flexibility to the administrator should the need for changes arise. This section will discuss the programming and documentation standards used for development to assist the administrator in navigating through the application code.

3.2 Programming Model

The application programming structure is modeled after ArcInfo's Arctools. Each task or step in the application is performed using a tool designed specifically for that task. A tool is comprised of an AML, a menu and a help file, all with the same prefix name (eg. build_routes.aml, build_routes.menu, build_routes.hlp). All tools are launched, executed, and exited by running the AML and specifying a command line argument which executes a routine in the AML of the same name. All tools contain the standard routines described in the table below.

Standard Tool Routines


Routine	Function
INIT	launch tool menu (default)
USAGE	returns valid command line syntax
HELP	pops up a text window with menu help (if the help file exists)
EXIT closes the menu, closes all sub-menus spawned by deletes all tool variables	
BAILOUT	called in the event of an AML error

Additional functions required by the tool such as validating widget input is run using the same syntax to execute the validation routine. The following command would launch the *build_routes* menu.

Arc: &r build_routes init

Once the menu is present, all tasks associated with the widgets are called from the menu program using the standard syntax. Below is an example of the routines called from a menu.

Example of menu program calls

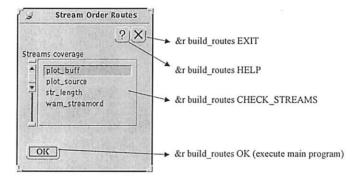

The Arctools programming structure allows all tools to operate independently and are therefore more easily incorporated into existing applications. This advantage also allowed the easy integration of existing generic Arctools into the WAM application. All tools relating to data management were implemented in this way and can be identified in the AML header information.

3.3 In-Line Documentation

Header and in-line documentation also follow a similar standard to that used in Arctools. Standard header information is illustrated below.

The history section of the header should be maintained to track any changes which are made to the AML after the initial installation. In addition to the header, most general tasks in the code are described using in-line documentation.

3.4 Temporary Files

Many of the processes in the application require the generation of temporary datasets in the form of grids, coverages, info tables, and system files. It is strongly recommended that the user not create files which start with 'XX' in the WAM project directories as this is the convention used in the application and by most ArcInfo processes to name temporary data. If all processes complete correctly there should be no residual temporary files. If for some reason a process has failed and temporary files do remain, they can be removed.

3.5 Variables

The standard global variable naming convention also adheres to the Arctools model. All global variable names have two components. The first part being the same name as that of the tool in which it was set, and the second describing what the variable represents. For example, <code>.build_basinSoutcov</code> is set and referenced in the <code>build_basin</code> tool (AML or menu) and will represent the output coverage. All variables not required outside the program in which they were set is defined as a local variable. This convention allows easy identification and deletion of variables set by a particular process.

4.0 Installing And Running The Application

4.1 Introduction

This section will describe the system requirements for running the WAM application, how to install the application code, how to set the system environment to run the application, how to launch the application, and finally the program flow.

4.2 System Requirements

The WAM application was developed in and requires ArcInfo (Rev 7.0.4) on the UNIX operating system. In addition to the core ArcInfo program the application requires the Grid raster modeling module and the TIN (Triangular Irregular Network) surface analysis module. The application will run in any X graphic environment that is supported by ArcInfo. Menu and form placement on the display may not be consistent across different X environments, but this will not affect functionality. The actual application code requires approximately 800K of disk space and can reside anywhere on the system under a common parent directory. Running the application does require a significant amount of both memory and disk space as many of the processes are very CPU intensive and create large temporary and resultant datasets. For example, a 25m resolution elevation grid with 2.2 million cells requires about 3.6Mb.


4.3 Application System Setup

WAM uses UNIX system environment variables to set the location of the application code, tables and data. In the user's .cshrc startup file, the \$WAMHOME environment variable must be set to the directory which contains the subdirectories code and models. Examples are shown below, you must substitute the correct locations for your site.

setenv WAMHOME /opt/app/wam

Once the application is installed, the directory structure should be the same as that illustrated below.

Directory structure

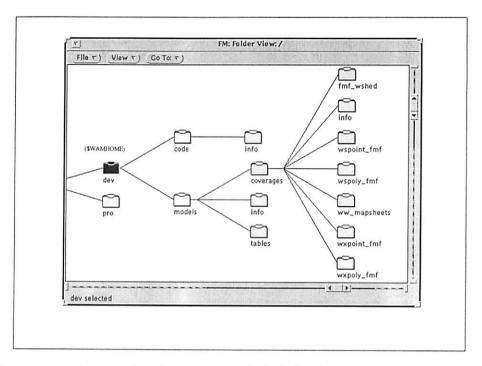

The arc *topogrid* command used to generate the hydrologically correct elevation grid may require additional virtual memory allocation to complete successfully. To override default memory allocation limits it is recommended that the Grid ALLOCSIZE system environment variable be set to a value of at least 100, if it has not previously been set. This variable is also set in the .cshrc file using the same syntax as described for the WAMHOME variable.

setenv GRIDALLOCSIZE 100

4.4 Application Data

The application uses several ArcInfo coverages located in the \$WAMHOME/models/coverages directory to perform analysis. Below is a list of these coverages, the process in which they are used and how they are applied in the application.

Coverage name/process	Description		
fmf_wshed/build elevation grid	Polygon coverage representing watershed boundaries for the FMF, digitized at about 1:250,000. It is used as a reference theme when defining project boundaries. Also it is optionally used in an overlay process to expand the user defined project boundary to include all overlapping watersheds.		
ww_mapsheets/build elevation grid	Polygon coverage representing the boundaries of the 1:20000 mapsheets for the FMF. It is used in an overlay process with the project boundary to determine which TIN datasets are required to generate the project elevation grid.		
wspoint_fmf/WRNSFMF	Point coverage of water gauging stations in the FMF. These points were used to generate Thiessen polygons (see wspoly_fmf).		
wspoly_fimf/WRNSFMF	Polygon coverage representing water gauging stations in the FMF. It is used in an overlay process with the basin coverage to determine which gauging station information should populate the output control table.		
wxpoint_fmf/WRNSFMF	Point coverage of weather stations in the FMF. These points were used to generate Thiessen polygons (see wxpoly_fmf).		
Wxpoly_fmf/WRNSFMF	Polygon coverage representing weather stations in the FMF. It is used in an overlay process with the basin coverage to determine which weather station information should populate the output control table		

4.5 Launching the Application

Once the **\$WAMHOME** environment variable is set, the user can launch the application from within ArcInfo as described below.


Arc: &r \$WAMHOME/code/wam

The administrator may wish to set the above command in an alias which could be called either from the X window main dropdown menu or via a single command in a shell window. Either of these options will make it faster and simpler for the user to launch the application.

4.6 General Flow

The diagram below illustrates the commands executed by each of the main menu options. The launching program wam.aml is executed at the arc prompt as described in the previous section.

Main Menu Program Calls

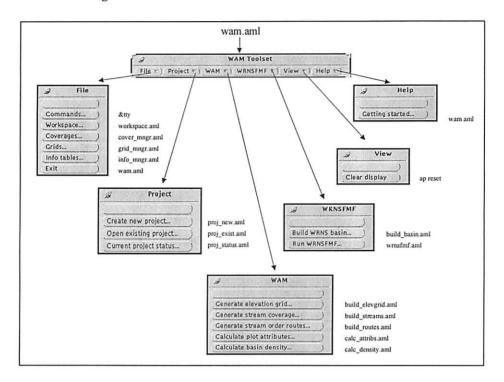

5.0 Application Tables

5.1 Introduction

This section will instruct the system administrator on how to make *standard* changes to the application, and will discuss how the application tables are used.

5.2 Application Defaults

Standard changes are those which were identified during the development as having the potential to change in the event, for example, input data structures change or analysis parameters must be altered to improve results. To make changing these parameters simpler than altering program code, the parameter value and the variable used to hold the parameter value are stored as records in an INFO table. The wam_defaults table stores these parameters. Some of the parameters are static, meaning that in order to change them the administrator must manually edit the table to change the value. Others are simply default values which initially populate menu widgets to simplify the interface. See Appendix A for a listing of the wam_defaults table and it's default values at installation. Below is a description of the variable name and what each represents. The var_name prefix will indicate the tool with which each is associated.

Wam defaults table

VAR_NAME	DESC		
.build_basin\$outcov	Default name of generated basin coverage.		
.build_elevgrid\$aspect_cov	Default name for output aspect coverage.		
.build_elevgrid\$cellsize	Default elevation grid cell size.		
.build_elevgrid\$elev_class	Default name for classified elevation coverage.		
.build_elevgrid\$elev_grid	Default output name for elevation grid.		
.build_elevgrid\$masterwshed	Coverage of watersheds for the FMF used in finding all watersheds overlapping the selected project area.		
.build_elevgrid\$sheetbdys	Coverage of 1:20000 mapsheets boundaries used to select required TIN datasets when generating an elevation grid.		
.build_elevgrid\$sheetitem	Name of the item on the sheet boundaries PAT which contains the sheet name.		
.build_elevgrid\$selwshed_b	Deafult boolean value to select underlying watersheds when defining the project boundary.		
.build_elevgrid\$hillshade	Default name of output hillshade grid.		
.build_elevgrid\$tinpath	Path to all available tins datasets, they must reside in a single directory.		
.build_elevgrid\$wshed_cov	Default name for output watershed coverage.		
.build_elevgrid\$wshedbuff	Distance to buffer selected watersheds to ensure that they fully encompass the watersheds defined in the DEM.		
.build_streams\$flowtol	Number of accumulated cells required to assign a cell as part of the flow path when generating streams from the elevation grid.		
.build_streams\$order_alg	Default stream ordering method.		
.build_streams\$stream_order	Default name of output stream coverage.		
.build_routes\$orderitem	Name of order item in streams AAT.		
.calc_attribs\$armtol	Search tolerance for 'arcrroutemeasure' command used to generate measures along routes from point features (the plots).		
.calc_attribs\$attrib_plots	Default name of output point coverage from the 'calc_attribs' process.		
.calc_attribs\$basincov	Default name of output basin and drainage area coverage.		
	Default distance to buffer up and down stream from the plot location.		
	Default search tolerance to snap plots to streams using for the arc 'near command'.		
	Default item on the RAT (route attribute table) containing stream order values.		

VAR_NAME	DESC		
.wam\$library	Default ArcInfo library. Used to draw library themes in the reference map and interactively during project area definition, drainage area creation and point coverage digitizing.		
.wam\$refextcov	Coverage defining the boundary of the sites management area boundary. This is used to set the map extent for the reference mapping during project area definition, drainage area creation and point coverage digitizing.		
.wam\$shadeset	Shadeset to use during reference mapping.		
.wam\$lineset	Lineset to use during reference mapping.		
.wam\$markerset	Markerset to use during reference mapping.		
.buildbasin_new\$mosaic_grid	Name and location of a single elevation grid covering entire management area. If path is not specified it will look in the current directory for a grid of the specified name.		
.buildbasin_new\$search_tol	Distance to search for closest pour point. This is used a parameter to the snappour command in Grid.		
.buildbasin_new\$flow_tol	Flow accumulation tolerance.		
.wrnsfmf\$bufdist	Buffer distance around harvest blocks.		
.wrnsfmf\$htitem	Default height item name on the forest cover PAT.		
.wrnsfmf\$prefix	Default out file prefix. (eg WRNS will create wrns_ut.dbf and wrns_ct.dbf)		
.wrnsfmf\$site	Site value used for selecting regeneration functions.		
.wrnsfmf\$sp1item	Default first species item on the forest cover PAT.		
.wrnsfmf\$hpyrcutitem	Default year of cut field for planned blocks.		
.wrnsfmf\$histyrcutitem	Default year of cut field for historical blocks.		
.wrnsfmf\$passdiff	Elapsed years between first and second pass. Used to calculate full rotation – pass_diff + rotation = end year		
.wrnsfmf\$rotation	Length of single rotation		
.wrnsfmf\$region	Default name of precipitation region – either CM or RM.		
. wrnsfmf\$install_site	Name of installation site.		
wrnsfmf\$yrcutitem	Default year of cut item on the harvest PAT.		

The administrator should be aware of the consequences of changing any of the default parameters, specifically those which impact output dataset results. These changes should first be discussed with end users to ensure that they are aware that any new datasets will be created using the altered parameters.

5.3 Project Tracking

As discussed in section 2.2 each WAM run is performed on a project basis. This was done as a measure to solve the problems incurred by datasets which were simply too large for the ArcInfo software to process on available hardware. Prior to any analysis in the application the user must define a new project or select an existing one. This will automatically, in the event of a new project, create a new workspace, and then take the user to the appropriate workspace. The location path and name of the project workspace, any new datasets created by the application, and the parameters used to generate new datasets are written to an application INFO table called *Projects*. When defining a new project the menu allows the user to assign metadata to the project which is also stored in the table. Below is a list of the fields in the *projects* table and a description of what each represents.

Field	Description		
Name	Name of the project		
Desc	Text description of the project		
User	Name of the user who created the project		
Date	Date the project was created		
Location	Location on disk where the project output data was created		
Cell_size	Cell size of the project elevation grid		
Elev_grid	Name of the project elevation grid		
Stream_cov	Name of project streams coverage		
Flow_tol	Flow accumulation tolerance parameter used when generating streams from the elevation grid.		
Plots_in	Name of input plots coverage.		
Plots_out	Name of attributed output plots coverage		
Basin_cov	Name of output basins coverage		
Aspect_cov	Name of output aspect polygon coverage		
Wshed_cov	Name of output watershed polygon coverage		
Elevclass_cov	Name of output elevation polygon coverage		
Hillshade_grid	Name of output hillshade grid		
Floodvol_tab	Name of output flood volume table		
Peakflow_tab	Name of output peak flow table		
Monthflow_tab	Name of output monthly flow table		
Profilebuf	Name of profile table for the plot buffer		
Profilesource	Name of profile table for route to source		

5.4 Stream Flow Calculations

During the *calc_attribs* process, flood volumes, peak flows, and monthly flows are calculated at each plot location. The calculations are based on the generated basin areas and formulae developed for sites within the Foothills Model Forest which are published in the *Hydrologic Operational Manual*.

Below is a table describing the application tables which are associated with the flow calculations. These tables should only be altered by persons knowledgeable in how the values are derived. The full tables and their original values are listed in Appendix A.

Table name	Description			
peak_flow.vol	Peak flow hydrography volumes for three elevation zones. This is required for peak flow calculations.			
monthflow_a1250.vol	Mean monthly unit flows for areas above 1250m. This is required for monthly flow calculations.			
monthflow_b1250.vol	Mean monthly unit flows for areas below 1250m. This is required for monthly flow calculations.			

Appendix A

Application Tables

To follow is a listing of all application tables. These tables are located in the \$WAMHOME/models/tables directory.

wam_defaults — This table is used to set default values for menu widgets and for site-specific installation parameters. The application administrator can alter these values as required .

VAR NAME	DESC THE application duffinishation	VALUE
.calc attribs\$armtol	search tolerance for arcrroutemeasure	2
.calc attribs\$buffer	buffer distance from plot along stream	500
.calc attribs\$attrib plots	name of output, attributed plot coverage	wam plots
.calc attribs\$neartol	search tol to snap plots to streams using near	500
.calc attribs\$basincov	name of output basin and drainage area coverage	wam basins
.build elevgrid\$cellsize	elevation grid cell size	25
.build elevgrid\$elev grid	default output name for elevation grid	wam elevgrid
.build elevgrid\$elev class	default name for classified elevation grid	wam elevclass
.build streams\$flowtol	cell tolerance for flowaccumulation command	100
.build elevgrid\$sheetbdys	name of coverage used for tin selection	\$WAMHOME/models/coverages/ww mapsheets
.build elevgrid\$masterwshed	master watershed coverage	\$WAMHOME/models/coverages/fmf wshed
.build elevgrid\$wshedbuff	buffer distance for selected master watershed poly	500
.build elevgrid\$tinpath	path to all available tins	/fmf4/tins
.build streams\$stream order	name of output stream coverage	wam streamord
.build streams\$order alg	stream ordering method	STRAHLER
.build elevgrid\$aspect cov	default name for output aspect coverage	wam aspect
.build elevgrid\$wshed cov	default name for output watershed coverage	wam wshed
.wrnsfmf\$bufdist	buffer distance around harvest blocks	100
.wrnsfmf\$histyrcutitem	year of cut item on the history PAT	vrcut
.wrnsfmf\$aspectitem	aspect item on aspect PAT	aspelass
.wrnsfmf\$site	default site value	fair
.wrnsfmf\$sp1item	first species item name on fc PAT	sp1
.wrnsfmf\$htitem	height item name on fc PAT	ht
.build basin\$outcov	default name of generated basin coverage	wrns basin
.build elevgrid\$sheetitem	item name on the sheet boundaries PAT	tile-name
.wrnsfmf\$prefix	default prefix for output files	wrns
.wrnsfmf\$passdiff	time difference between first and second pass	20
.wrnsfmf\$rotation	length of 1 rotation	80
.wrnsfmf\$region	name of default precip region	CM
.wrnsfmf\$install site	Name of installation site	fmf
.wrnsfmf\$hpyrcutitem	year of cut item on the hp PAT	yrcut
.build routes\$orderitem	default item on AAT containing order	order
.build elevgrid\$selwshed b	Boolean to select sheets which overlap tiles	.TRUE.
.build elevgrid\$hillshade	name of output hillshade grid	wam hillshade
.wam\$library		base20
.wam\$refextcov	coverage defining extent of entire MA	\$WAMHOME/models/coverages/fmf wshed
.buildbasin new\$mosaic grid		wam elevgrid
.buildbasin new\$searchtol		1000
.buildbasin new\$flowtol	currently overridden by build streams tol	250
.wam\$shadeset	default shadeset	colornames
	1 6 1 11	plotter
.wam\$markerset	default markerset	plotter
calc attribs\$orderitem	defaults item on AAT containing order value	order

aspect.remap – Used to generate the output aspect class polygon coverage and to create aspect class polygons when generating the WRNSFMF output dataset.

VALUE	SYMBOL	ASPECT		
1.0	0.0	F		
2.0	96.0	N		
3.0	98.0	EW		
4.0	99.0	S		
5.0	90.0	EW		

floodvol.remap - This table is used to remap the area inside the drainage area for calculating the flood volumes.

VALUE	CLASS
1250.0	1250.0
1500.0	1500.0
4500.0	4500.0

monthflow_a1250.vol - Used in conjunction with drainage area to calculate monthly flows.

THE STATE STREET, NAME OF STREET	Charles San	Telliporture of the color	g and to the continue mentally norms.		
PERIOD	LOW_10	LOW_5	MEAN	HIGH_5	HIGH_10
March	0.0009	0.001	0.0015	0.0023	0.0029
April	0.0028	0.0034	0.0051	0.0079	0.0096
May	0.0031	0.0042	0.0076	0.014	0.019
June	0.0029	0.0038	0.0067	0.013	0.017
July	0.0019	0.0028	0.0062	0.014	0.022
August	0.0014	0.0021	0.0046	0.0098	0.014
September	0.0017	0.0023	0.0043	0.008	0.011
October	0.0015	0.0019	0.0032	0.0069	0.0093

monthflow_b1250.vol - Used in conjunction with drainage area to calculate monthly flows.

PERIOD	LOW_1	LOW_5	MEAN	HIGH_5	HIGH_10
march	0.0009	0.001	0.0015	0.0023	0.0029
april	0.0028	0.0034	0.0051	0.0079	0.0096
may	0.0031	0.0042	0.0076	0.014	0.019
june	0.0029	0.0038	0.0067	0.013	0.017
july	0.0019	0.0028	0.0062	0.014	0.022
august	0.0014	0.0021	0.0046	0.0098	0.014
september	0.0017	0.0023	0.0043	0.008	0.011
october	0.0015	0.0019	0.0032	0.0069	0.0093

monthflow.remap — This table is used to remap the area below and above 1250 meters inside the drainage area for calculating monthly flows.

VALUE	CLASS		
1250.0	1250.0		
4500.0	4500.0		

peak_flow.vol - Used in conjunction with drainage area to calculate instantaneous peak flows.

RETURN_YRS	BELOW_1250	F1250_1500	F1500	
2.0	25.0	45.0	50.0	
10.0	65.0	75.0	90.0	
20.0	80.0	90.0	110.0	
50.0	95.0	110.0	135.0	
100.0	110.0	125.0 160.0		

elevgreen.lut – Used as a symbol look-up for drawing the elevation grid classified by 50 meter intervals. The shadeset must be *colornames* to display the correct shades. This table is not used directly by the application.

Value	Symbol	
600.0	77.0	
700.0	62.0	
800.0	61.0	
900.0	64.0	
1000.0	65.0	
1100.0	68.0	
1200.0	69.0	
1300.0	73.0	
1400.0	110.0	
1500.0	108.0	
1600.0	105.0	
1700.0	101.0	
4500.0	95.0	

class_50m.remap - Used as a symbol look-up for drawing the elevation grid classified by 50 meter intervals. The shadeset must be *colornames* to display the correct shades. This table is not used directly by the application. This table is not illustrated due to its size.